



Editorial

Sailing is synonymous with freedom.

But navigation all bodies of water, from the coast to alpine lakes, large rivers on the coasts of the mediterranean or the Atlantic it's even better!

By choosing a Sun way trailer, you opt for safety on the road and efficiency for your handling.

On the slipways and on the route of holidays, Sunway Boat Trailers are and have become the best-selling trailers in France.

Partner of the biggest boat brands, partner of many nautical events, in being in constant contact with users and listening of our network, we have been able to improve year after year our products.

Many innovations are presented to you in this catalog and allow us to remain the market leaders.

From the standard boat trailer to the submersible trailer 3t5, the full range of our products is in this catalog, which will help you to make the right choice.

Our network of professional distributors present throughout France and in the main European countries is at your disposal to inform you, and you offer the ideal trailer for your use.

Have a good trip and safe navigation.

SUM Summary

05

THE SAFETY POINTS 14
Breakback Range

21

Boat Yard Range

06

OUR EVOLUTIONS 16

Inflatable range

22

Showroom Dollies and stands

07

OUR GUIDE 17

Jet Ski Range 23-24

Accessories

08

Fast Launch Range 18

Small Boat range

26

Our **PARTNERS**

12


Galaxy Range 20


Keelboat range


Selfetty Points

Category| Derating| Payload










Derating

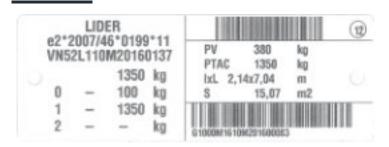

PV = Payload, PTAC = DGGW

Derating DGVW= reduced Payload*

Exemple:

G1000M16: DGVW: 1350 kg / Payl;oad: 970 kg


if derating to DGVW: 1200 kg Payload will = 820kg (reduction of 150Kg)

Attention, change possible BEFORE REGISTRATION only


DGVW possibles (contact your dealer)

Max and overall lengths

Fast Launch Range

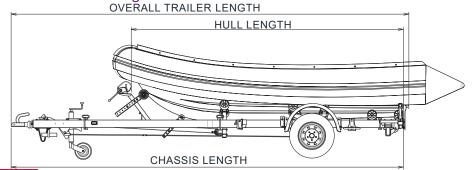

Galaxy 2 Range

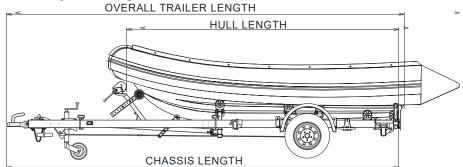

Guide





Disc brakes with oil bath hubs

Axle bearings guaranteed leakproof. Oil bath hubs with visual inspection present on all Fast range trailers, braked and unbraked. SUN WAY guarantees its axles in the FAST



Step hull roller kit

The STEP roller kits can be fitted to the majority of trailers in the Sun way range. They allow any type of hull to be easily mounted on the trailer. Particularly effective on the Fast range!



Oil bath hubs

Thanks to its transparent cap, the oil bath hub makes it possible to check the proper lubrication of the bearings and the absence of water in the hub.



Stainless steel fittings

The U Bolts, the brake cables and the bolts are in marine quality stainless steel A4. The wings are in stainless steel.



LED lights

LED lights allow less battery consumption, but above all better reliability of the lighting: no more jbroken filaments or bulbs that disconnect.



Waterproof LED lights

SUN WAY guarantees its watertight lights, Lens and connectors for the immersion-proof lights for two years.

Abrivations:

Longrons = Chassis legs

DGVW = Design Gross Vehicle Weight (DGVW) means the gross weight of a vehicle laden with the load heaviest which it can reasonably carry

LP = Load Capacity



WELCOME TO FREE NAVIGATION!

and reliability of this historic range.

With more than 30,000 Galaxy trailers sold since Sunway became part Equipped with a central tilting track, the boat remains centered on its of the Lider company, we have had plenty of time to prove the strength rollers throughout the ascent and descent, maintaining a triangulated structure.

Now is the time to make it evolve, now called

This new Galaxy 2.0 will facilitate your handling, while keeping its road qualities.

Galaxy 2.0.

Available options

- Electric winch
- Walkway

- Specific equipment for step hulls
- Fixed waterproof led lights
- Rinsing kit







Unbraked | Braked 1 axle

Unbraked | I

GS75 | GS09 | (





Model	DGVW (In Kgs)	Pv (en kg)	Wheels	ıvıax Payload	онаээнэ юнуш (нт m)	m)	i(n m)	(in M)	
Unbraked									
GS75	750	190	155/70 R 13	560	5.15	4.80	1.83	5.99	
Braked 1 axle									
GS10	1000	330	175/70 R13	570	5.7	4.90	2.07	6.78	
GS12	1200	350	165R13C	850	5.7	4.90	2.07	6.78	
GS13	1350	370	165R14C	980	6.18	5.52	2.17	7.27	
GS16	1600	400	185R14C	1200	6.18	5.52	2.17	7.27	
GS18	1800	440	195R14C	1360	6.68	6.02	2.17	7.77	



All unbraked trailers are equipped with oil bath hubs



Braked2 & 3 axles





Model	DGVW (In Kgs)	Tare (in Kg)	Wheels	Max Payload	Chassis length (in m)	Hull length (in m)	Overall Width i(n m)	Overall Lenght (in M)		
	Braked 2 axles									
GD09	1800	480	175/70 R13	1320	6.68	6.05	2.18	7.76		
GD12	2400	540	165R13C	1860	7.16	6.45	2.33	8.24		
GD13	2700	555	165R14C	2145	7.16	6.45	2.33	8.24		
GD16	3200	640	185R14C	2560	7.69	6.95	2.33	8.77		
GD18	3500	665	195R14C	2835	7.69	6.95	2.33	8.77		
			Br	aked 3 ax	kles					
GT16	3500	890	185R14C	2610	9.19	8.55	2.32	10.4		

Info: Max overall length = chassis length + 75cm * modification of the DGVW is not possible after ordering



Fast Launch Range

Unbraked / Braked 1 axle









D1655 | D1657

Bunks + roller kit or multi-roller kit

Model	DGVW max (kg)	Wheels	Max Payload	Chassis length (in m)	Hull length (in m)
D1655	500 —	500 x 10	342 kg	5.00	4.30
D 1000	500 —	135R13	336 kg	5.00	4.30
D1657	750	155/70R13	550 kg	5.30	4.60



All these unbraked trailers are equipped with oil bath hubs



D1657 With Multi-roller Kit

Braked Single Axle











Bunks + roller kit, multi-roller kit or steped hull kit

DGVW	Wheels May Payload		Chassis length (in m)	Hull length (in m)	long
max (kg)			Longerons short	Longerons short	Longerons
1000	185/70R13	660 kg	5.70	4.70	+ 60 cm
1350	165R14C	940 kg	6.20	5.20	+ 80 cm
1500	175R14C	1070 kg	6.50	5.50	+ 80 cm
1600	195/70R15C	1160 kg	6.50	5.50	+ 80 cm
1800	195/70R15C	1300 kg	6.50	5.50	+ 100 cm
	max (kg) 1000 1350 1500 1600	max (kg) Wheels 1000 185/70R13 1350 165R14C 1500 175R14C 1600 195/70R15C	max (kg) Wheels Max Payload 1000 185/70R13 660 kg 1350 165R14C 940 kg 1500 175R14C 1070 kg 1600 195/70R15C 1160 kg	DGVW max (kg) Wheels Max Payload short length (in m) Longerons short 1000 185/70R13 660 kg 5.70 1350 165R14C 940 kg 6.20 1500 175R14C 1070 kg 6.50 1600 195/70R15C 1160 kg 6.50	DGVW max (kg) Wheels Max Payload length (in m) (in m) 1000 185/70R13 660 kg 5.70 4.70 1350 165R14C 940 kg 6.20 5.20 1500 175R14C 1070 kg 6.50 5.50 1600 195/70R15C 1160 kg 6.50 5.50



D1613 With Bunks + roller kit

WheelsInfo: Payload reduction for long longron versions

Fast Launch Range

Braked 2 axles

Braked 2 Axles









D1621 | D1623 | D1625 | D1628

Bunks + roller kit, multi-roller kit or step hull kit

Model	DGVW	Wheele	Wheels Max Payload —		Hull length (in m)	lona
wodei	max (kg)	wneers	Max Payload	Longerons short	Longerons short	Longerons
D1621	2000	185/70R13	1460	7.10	6	+ 100 cm
D1623	2700	165R14C	2010	7.60	6.50	+ 60 cm
D1625	3000	175R14C	2290	7.70	6.70	+ 140 cm
D1628	3500	195/70R15C	2760	7.70	6.70	+ 140 cm

D1628 With Multi-roller Kitx

Description of the kits





TR: Triple Roller



DR: Double Roller



DRS: Double Roller Support



SRS: Single Roller Support

SPEC Speciales

Braked 2 Axles welded chassis









D1623SN | D1625SN | D1628SN

Multipurpose trailers fitted with Bunk kit for: boats with propeller shaft, Wake and Ski boats s

Model	DGVW max (kg)	Wheels	Max Payload	Chassis length (in m)	Hull length (in m)
D1623SN	2700	165R14C	2010 kg	7.10	6
D1625SN	3000	175R14C	2290 kg	7.70	6.70
D1628SN	3500	195/70R15C	2700 kg	8.50	7.40

Available with adjustable supports option: \$32026



Welded frame range

Sun-way has partnered with the biggest brands to offer specific trailers for certain Models. Check with your resellers.





Breakback Range

Unbraked | Braked 1 axle







SW385M16 | SW535M16


Model	DGVW max Kg	Wheels	Max Payload	Chassis length (in m)	Hull length (in m)	
SW385M16	500 -	500x10	350 kg	5.00	4.60	
34430314110	500 -	135R13	344 kg	5.00	4.00	
SW535M16	750	155/70R13	560 kg	5.00	4.60	

SW535M16 Info: Max overall length = chassis length + 60cm

Braked 1 axle



All these unbraked trailers are equipped with oil bath hubs





Model	DGVW max Kg	Wheels	Max Payload	Chassis length (in m)	Hull length (in m)
SW655M16	900	175/70R13	650 kg	5.50	4.70
SW845M16	1200	165R14C	900 kg	5.70	4.80
SW1005M16	1300	165R14C	990 kg	6.00	5.00
SW1265M16	1600	185R14C	1240 kg	6.10	5.20

SW845M16 Info: Max overall length = chassis ength + 60cm

IInfo: Max overall length = chassis length + 75cm

14

Brakeback Rauge

Braked 2 axles



Braked 2 axles



SW1405M16 | SW1665M16 | SW2025M16 with central roller chassis

SW1665M16

with central roller chassis



Model	DGVW max Kg	Wheels	Max Payload	Chassis length (in m)	Hull length (in m)
SW1405M16	1800	175/70R13	1360 kg	6.90	5.90
SW1665M16	2120	185/70R13	1610 kg	7.40	6.40
SW2025M16	2500	165R14C	1980 kg	7.40	6.50

Info: Max overall length = chassis length + 60cm

Auflatable Rauge B LES

Unbraked





SW345Pn12

Unbraked



Model	DGVW max Kg	Wheels	Max Payload	Chassis length (in m)	Hull length (in m)	
SW225Pn12	360 -	500x10	236 kg	- 4.00	3.60	
3W225F1112	360	135R13	230 kg	- 4.00	3.00	
SW265Pn12	500 -	500x10	340 kg	- 4.50	4.20	
3W265P1112	500 -	135R13	334 kg	- 4.50		
SW245Bn42	500	500x10	335 kg	- 4.70	4.40	
SW345Pn12	500	135R13	329 kg	- 4.70		



All these unbraked trailers are equipped with oil bath hubs BRAKED 1 Axle



16 www.sun-way.fr

(2)

ki Range

Unbraked | Doubles Jet Fast



<u>Unbrake</u>d

G250J14 | G500J20 Single Jet Ski

Model	DGVW max Kg	Wheels	Max Payload
G250J14	500 -	500x10	380 kg
G250J14		135R13	370 kg
G500J20	650	155/70R13	500 kg



The G500J20 are equipped with oil bath hubs

INOX (a) (a)



D2057J | D1613J Double Jet Ski




Model	DGVW max Kg	Wheels	Max Payload
	Unbrak	ed	
D2057J	750	155/70R13	450 kg
	BRAKED '	l Axle	
D1613J	1350	165R14C	990 kg





Unbraked

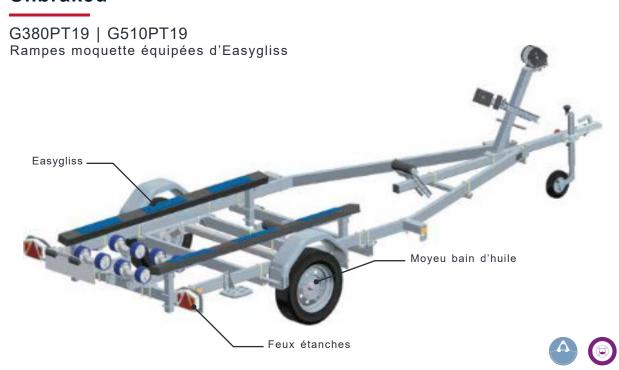

Model	DGVW max Kg	Wheels	Max Payload	Chassis length (in m)	Hull length (ir m)
G380PT19		F 00	4.00		
G360P119	500 -	135R13	314 kg	5.00	4.60
G510PT19	750	155/70 R13	520 kg	5.10	4.70
O	ption		Dési	gnation	
S38001pour G510PT18		2 basculeurs	s double suppléme	entaires au centre de	la remorque




B) / S S Bass Boat

Braked 1 & 2axles



Braked 1 axle | Braked 2 axles

G1000PT20 | G1340PT20 | GT1602PT20 | G1942PT20

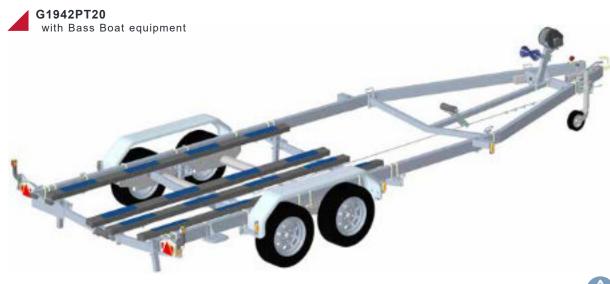

Model	DGVW (In Kgs)	PV (en kg)	Wheels	Max Payload	Chassis length (in m)	Hull length (in m)	Largeur HT (en m)	Longueur HT (en m)
Braked 1 axle								
G1000PT20	1350	420	165R14C	930	6,48	5,4	2,52	6,62
G1340PT20	1800	480	195R14C	1320	6,78	6,9	2,52	6,91
	Braked 2 axles							
G1602PT20	2120	550	185/70R13	1570	7,13	7,25	2,53	7,26
G1942PT20	2500	570	165R14C	1930	7,13	7,25	2,53	7,27

Reelboat Range

Freinées 1 & 2 cocious









Braked 1 axle

TBSV09 | TBSV12 | TBSV13 | TBSV16 | TBSV18 Sail-boat kit / Deep draft sail-boat kit

Model	DGVW max Kg	Wheels	Max Payload	Chassis length (ir m)
TBSV09	900	175/70R13	570 kg	5.70
TBSV12	1200	165R14C	850 kg	5.70
	si le tirant d'eau > 6	60 cm, ajouter le Kit Gr	and Tirant d'Eau S40	0021
TBSV13	1350	165R14C	980 kg	6.18
TBSV16	1600	185R14C	1200 kg	6.18
TBSV18	1800	195R14C	1360 kg	6.68

Braked 2 axles

TBDV09 | TBDV12 | TBDV13 | TBDV16 | TBDV18 Sail-boat kit / Deep draft sail-boat kit

Model	DGVW max Kg	Wheels	Max Payload	Chassis length (in m)
TBDV09	1800	175/70R13	1320 kg	6.68
TBDV12	2400	165R13C	1860 kg	7.16
TBDV13	2700	165R14C	2145 kg	7.16
TBDV16	3200	185R14C	2560 kg	7.70
TBDV18	3500	195R14C	2835 kg	7.70

Small Boaswall Boats

Small Boats | Options





S28023





S28024

S28025





SW220MP12 + S28026 Bunks for small boats

SW220MP12 + S28027 Roller kit for motorboat

SW220MP12 + S28028
Pads for inflatables

Porte-Barques



SW220MP12

SW220MP12

Important: Cannot be sold without an option \$28026, \$28027 or \$28028.

Model	DGVW max (kg)	Wheels	Max Payload
SW220MP12	360	400 x 10	260 kg



All these unbraked trailers are equipped with oil bath hubs

Options

Reference	Description	Weight Kg
S28023	Jockey wheel	5 kg
S28024	Winch + support post	8 kg
S28025	Spare wheel + mounting U bolt	6 kg
Reference	Description	Support height
S28026	Bunks for	
320020	small boats	-
S28027	small boats Roller kit for motorboat	350 mm

Boatyard Range I Maille 18

Timon Basculant Lunbra



SW1400MA21
Brakeback esign with fixed axle



G1942MA16
Galaxy design + Suspension axles



MA1828SN Fast design + Suspension axles + bunk kit

Brakeback design

SW700MA21| SW1000MA21| SW1400MA21| SW2400MA21

Model	DGVW max Kg	Wheels	Max Payload	L. remorque
SW700MA21	900	195/50R13C	700 kg	5.30 m
SW1000MA21	1300	165R14C	1000 kg	6.60 m
SW1400MA21	1700	195R14C	1400 kg	6.80 m
SW2400MA21	2700	165R14C	2300 kg	8 m

Galaxy Design - Unbraked

G1000MA16 | G1340MA16 | G1942MA16

Model	DGVW max Kg	Wheels	Max Payload	Chassis length (in m)	Hull length (in m)
G1000MA16	1350	165R14C	1010 kg	6.20	5.50
G1340MA16	1800	195R14C	1365 kg	6.50	5.80
G1942MA16	2700	165R14C	2175 kg	7	6.20

Fast Welded Frame Design - Unbraked



MA1828SN

Bunk Kit with rollers

Model	DGVW max Kg	Wheels	Max Payload	Chassis length (in m)	Hull length (in m)
MA1828SN	3500	195R14C	2865 kg	8.40	7.40

Dollies & Stands

Exhibition | Storage

Wheeled cradles

S33001 | S35001









model	Load Capacity	Dimensions (mètres)
S33001	1,2 Tonnes	1,3 x 1
S35001	2,5 Tonnes	3,2 x 1,4

Exhibiton Stands

S30018

Set of 3 stands. Payload: 2 Tons



Storage Frames

S01360 | S32019 | S01359 | S32018 Front or rear cradles





S01360 | S32019 Rear Frame




Model	Position	Charge utile patins positionnés au plus bas	Charge utile patins positionnés au plus haut
S01360	Arrière	1Tonne	0.6 Tonne
S32019	Arrière	3 Tonnes	1.75 Tonnes
S01359	Avant	1Tonne	0.6 Tonne
S32018	Avant	3 Tonnes	1.75 Tonnes
S40016	Avant	3 Tonnes	1.5 Tonnes

Podium stands

S38006


Set of 3 stands. Payload: 5 Tons



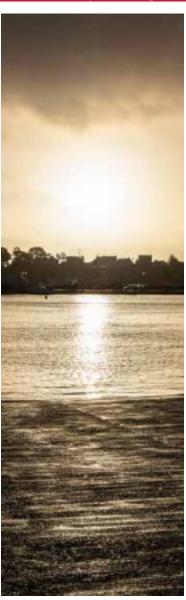

Accessories ORIES

Ontional Equipomont

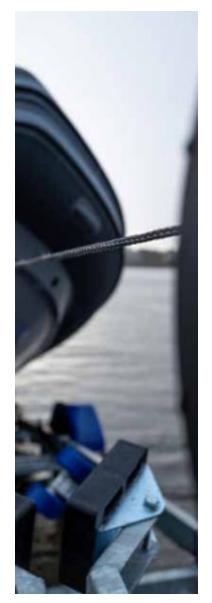





S32025 100 x 50 S32026 85 x 40 S32032 60 x 60



Winch support extension

S10020 Sold without winch



Walkway Kit

S38002 for GS09 to GS16 S38003

For GS18 to GT16





Add-on keel roller

\$33004*
Roller attached above the cross member

S30021 | S32028* Roller inserted in front of the cross member

ACCESS Accessories

Optional Equipment



Lashing / Strapping Point

S01972**



Foot Step

S01516**



Electric Winch Kit

\$38018 2T5 \$38019 2T5 \$38017 3T



Rocker Riser

S01923B 1per rocker



Sangle & Support Sangle

S40010 U Bolts not included



Demountable winch Bracket

S39005 : Complet S39013 : Plate



Centering Kit

S40027 CENTERING KIT for 2021 D1657

S40026 CENTERING KIT forS 2021 D1655

S40029 CENTERING KIT for 2021 D1618-D1628

\$40028 CENTERING KIT for 2021 D1611-D1616











ATM Communication

ATM Communication wishing to modernize and innovate in the field of sea photography, with ever more up-to-date onboard systems.

technologically advanced, without wishing to lose land mobility to cover larger geographical areas. nothing seemed more obvious than to maintain the trailer partnership already in place with Sunway and its Fast Immersible range

Chevalier Fish Team

Lionel and Mayeul Chevalier have equipped their Nitro Z9 with a Fast Sun way trailer.

Their many trips across Europe (Holland, Spain, etc.) make them intensive users of their trailer.

" Super pleasant trailer despite the weight of our boat, remarkable. "

Vendée Globe 2020

Sun Way is a partner of HIGHFIELD, official partner of the Vendée Globe.

Route du Rhum

Sunway, in collaboration with the Highfield brand, will equip all the safety boats of the organization of the Route du Rhum. A major operation which is a continuation of the Vendée Globe partnership, and which adds to the partnership with Romain Attanasio (IMOCA FAMILLE MARY ETAMINE DU LYS) and Sam Davies (IMOCA INITIATIVES HEART).

Rartners |



<u>Fiiish</u>

The collaboration between Sunway and Filish was based on precise and demanding specifications: A trailer capable of absorbing very intensive use, resistant to an aggressive saline environment, fully immersible, in order to be able to have confidence at each launch whatever the conditions.

The Breton brand uses a D1616 multi-roller trailer equipped with waterproof LED lights



